



Recommended P/N 2576-0**-00

PART NO.	POS.	A	B
2576-#20-**-**	20	15.05	16.45
2576-#30-**-**	30	20.05	21.45
2576-#40-**-**	40	25.05	26.45
2576-#50-**-**	50	30.05	31.45

2576-0**-**-**形状

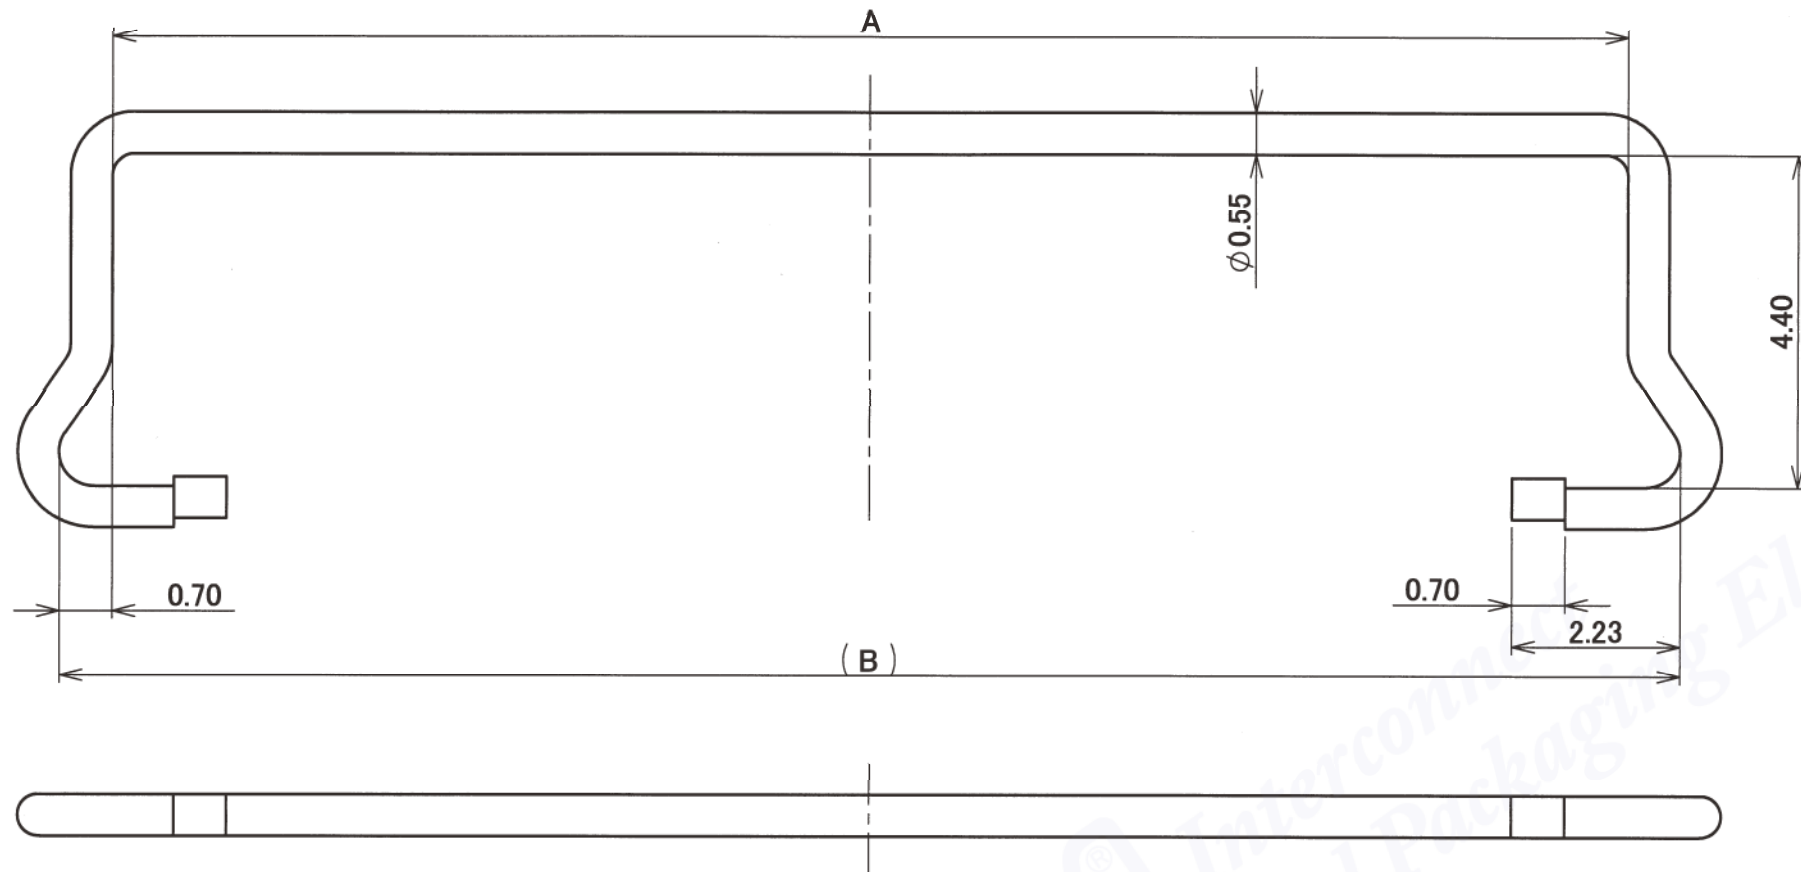

P/N:2576-#**-**-**
SEE NOTE.3
SEE NOTE.2

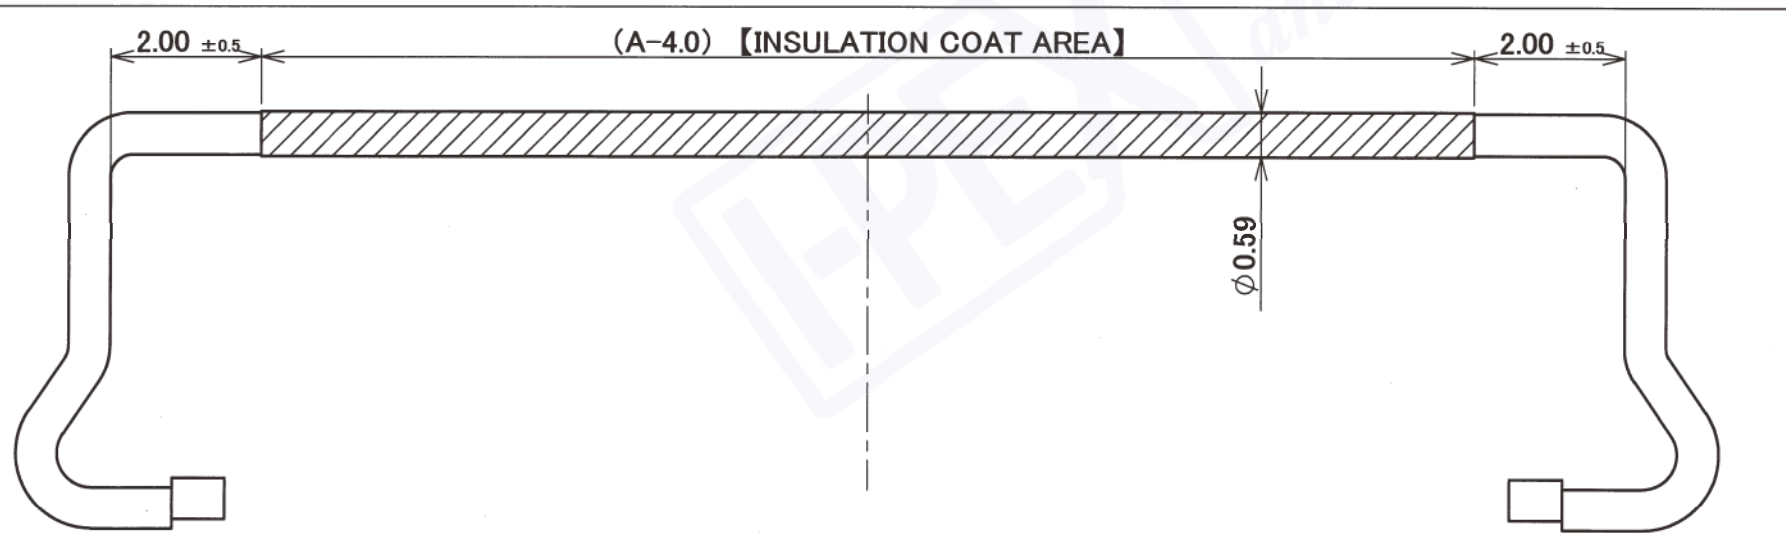

2576-1**-**-**形状
2**-**-**-**形状

- NOTES.
- MATERIAL
SUS φ0.55
 - 樹脂コート/INSULATION COAT
- | PART NO. | INSULATION COAT | COLOR |
|----------------|-----------------|-------|
| 2576-0**-**-** | 無/without | - |
| 2576-1**-**-** | 有/with | BROWN |
| 2576-2**-**-** | 有/with | BLACK |
- 梱包数量/PACKING QTY
- | PART NO. | SHIPPING CARTON | PACKING CARTON |
|----------------|-----------------|----------------|
| 2576-#**-**-** | 15,000pcs | 60,000pcs |
| 2576-#**-**-00 | 5,000pcs | 20,000pcs |
- RoHS Compliant

PATENT REGISTERED

I-PEX DAI-ICHI SEIKO CO.,LTD.
I-PEX Business Company

TITLE
CABLIN-VS
PLUG PULL BAR

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

SERIES No.	R0	CUSTOMER COPY	PROJECTION	SCALE	UNIT	DWG. No.	SHEET	REV.
				10:1	mm	2576	1/1	9

Confidential III C